


Effects of Technology Cost Parameters on Hydrogen Pathway Succession

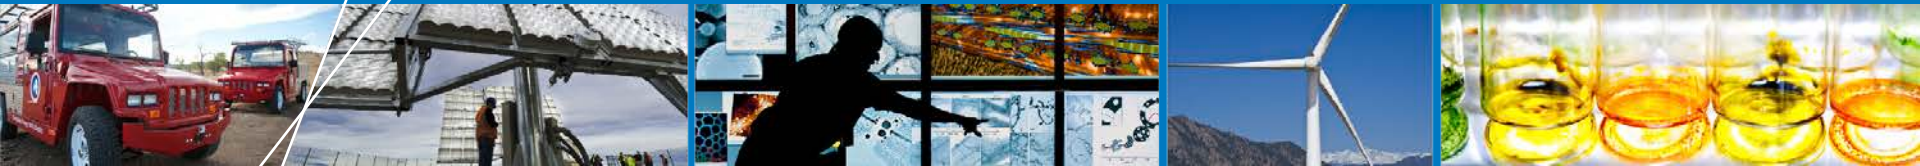

2012 Annual Merit Review

Mark F. Ruth & Victor Diakov (NREL)

Brian James, Julie Perez, & Andrew Spisak (Directed Technologies, Inc.)

15 May 2012

This presentation does not contain any proprietary, confidential, or otherwise restricted information

Overview

Analysis Timeline & Budget

Start date: Feb 2009

Status: Completed Oct 2011

100% DOE funded

- \$150K DTI
- \$75K NREL

MSM Timeline & Budget

Start date: Feb 2005

Status: ongoing

Percent complete: 80%

100% DOE funded

FY11 funding

- \$250K NREL/Systems Integration
- \$100K Sandia NL

FY12 funding

- \$150K NREL/SIO
- \$100K Sandia NL

Barriers

- Future market behavior (A)
- Inconsistent data, assumptions and guidelines (C)
- Suite of models and tools (D)

Partners

Sandia National Laboratories (SNL)

- Computational development

NREL

- H2A Production, HyDRA

Argonne National Laboratory (ANL)

- HDSAM, GREET


Directed Technologies, Inc. (DTI)

- HyPRO

SENTECH (now SRA)

- MSM User Guide

Effects of Technology Cost Parameters on Hydrogen Pathway Succession

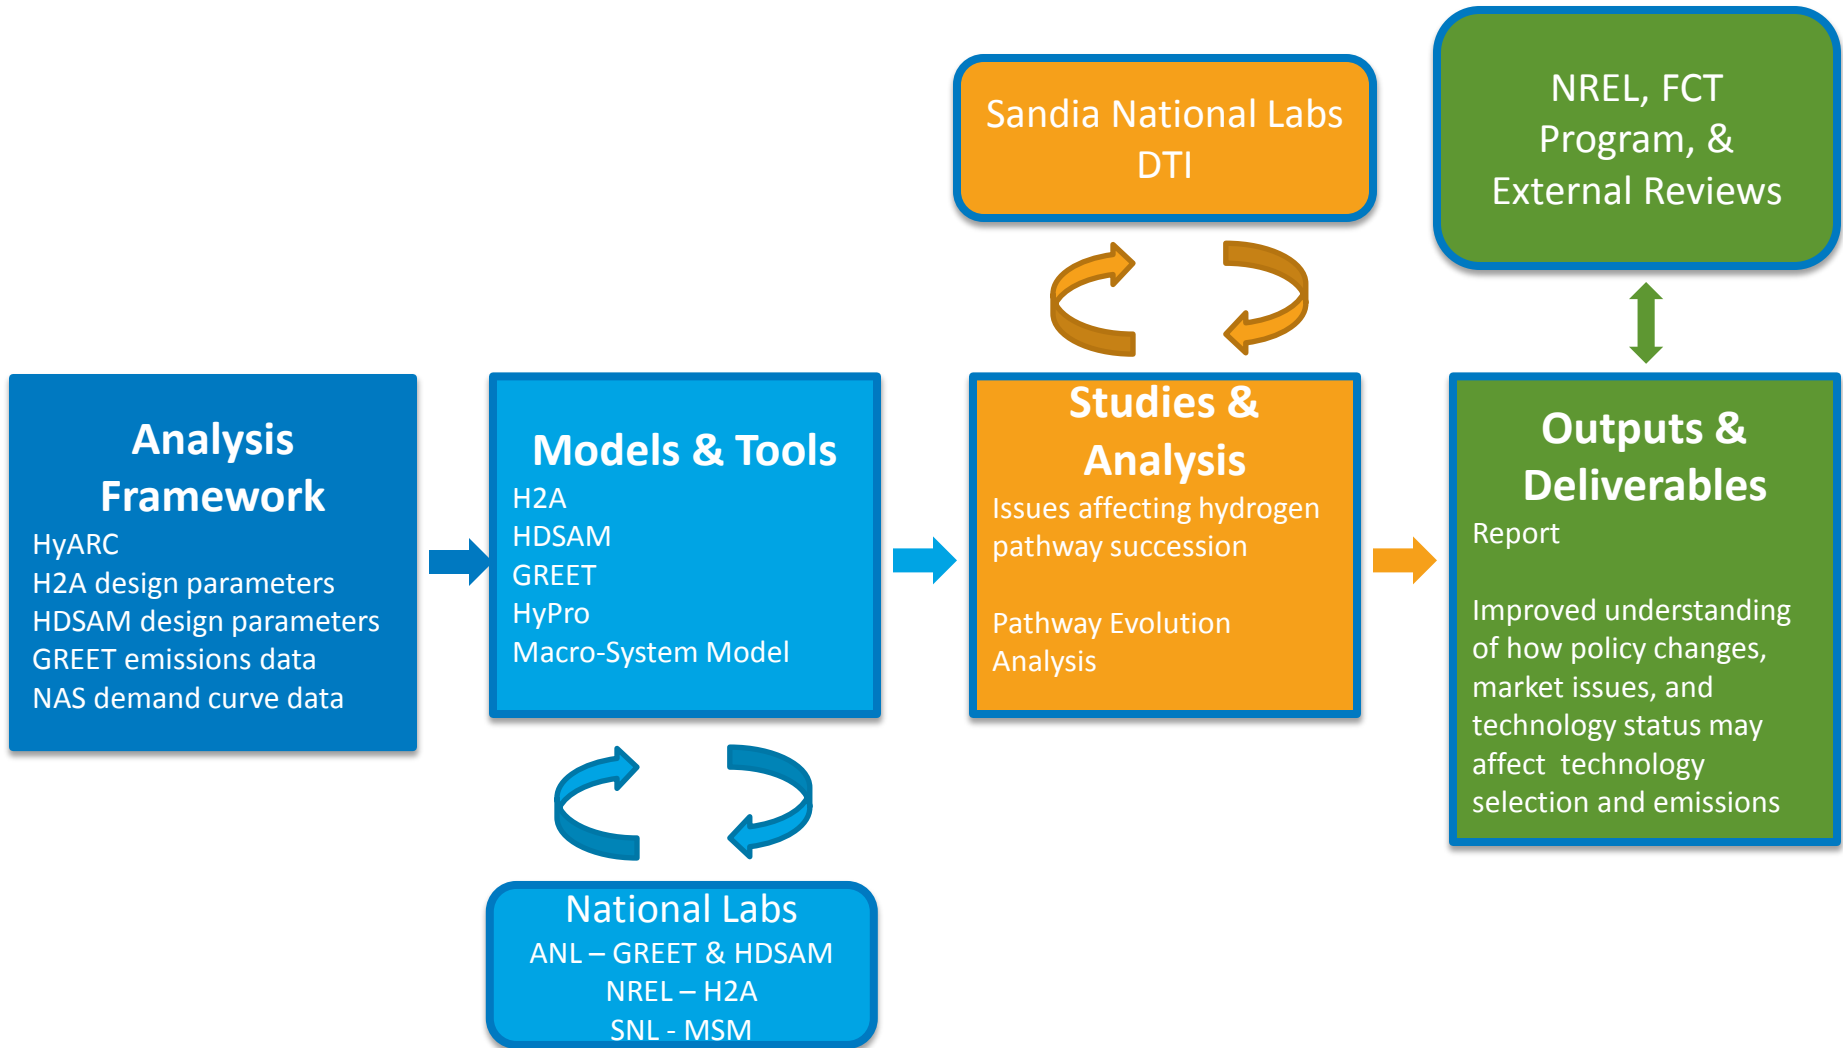


Improve understanding of options and tradeoffs in the evolution of hydrogen production and delivery infrastructure for transportation.

Specific focus on:

- What is a likely succession of hydrogen pathways?**
- How might major factors influence the sequence?**


Primary Analytical Tool: MSM

The Macro-System Model (MSM) provides a **central transfer station** to simplify communication across models and guarantee consistency in simulations that involve multiple models. A graphical user interface (GUI) allows users to easily use the models.

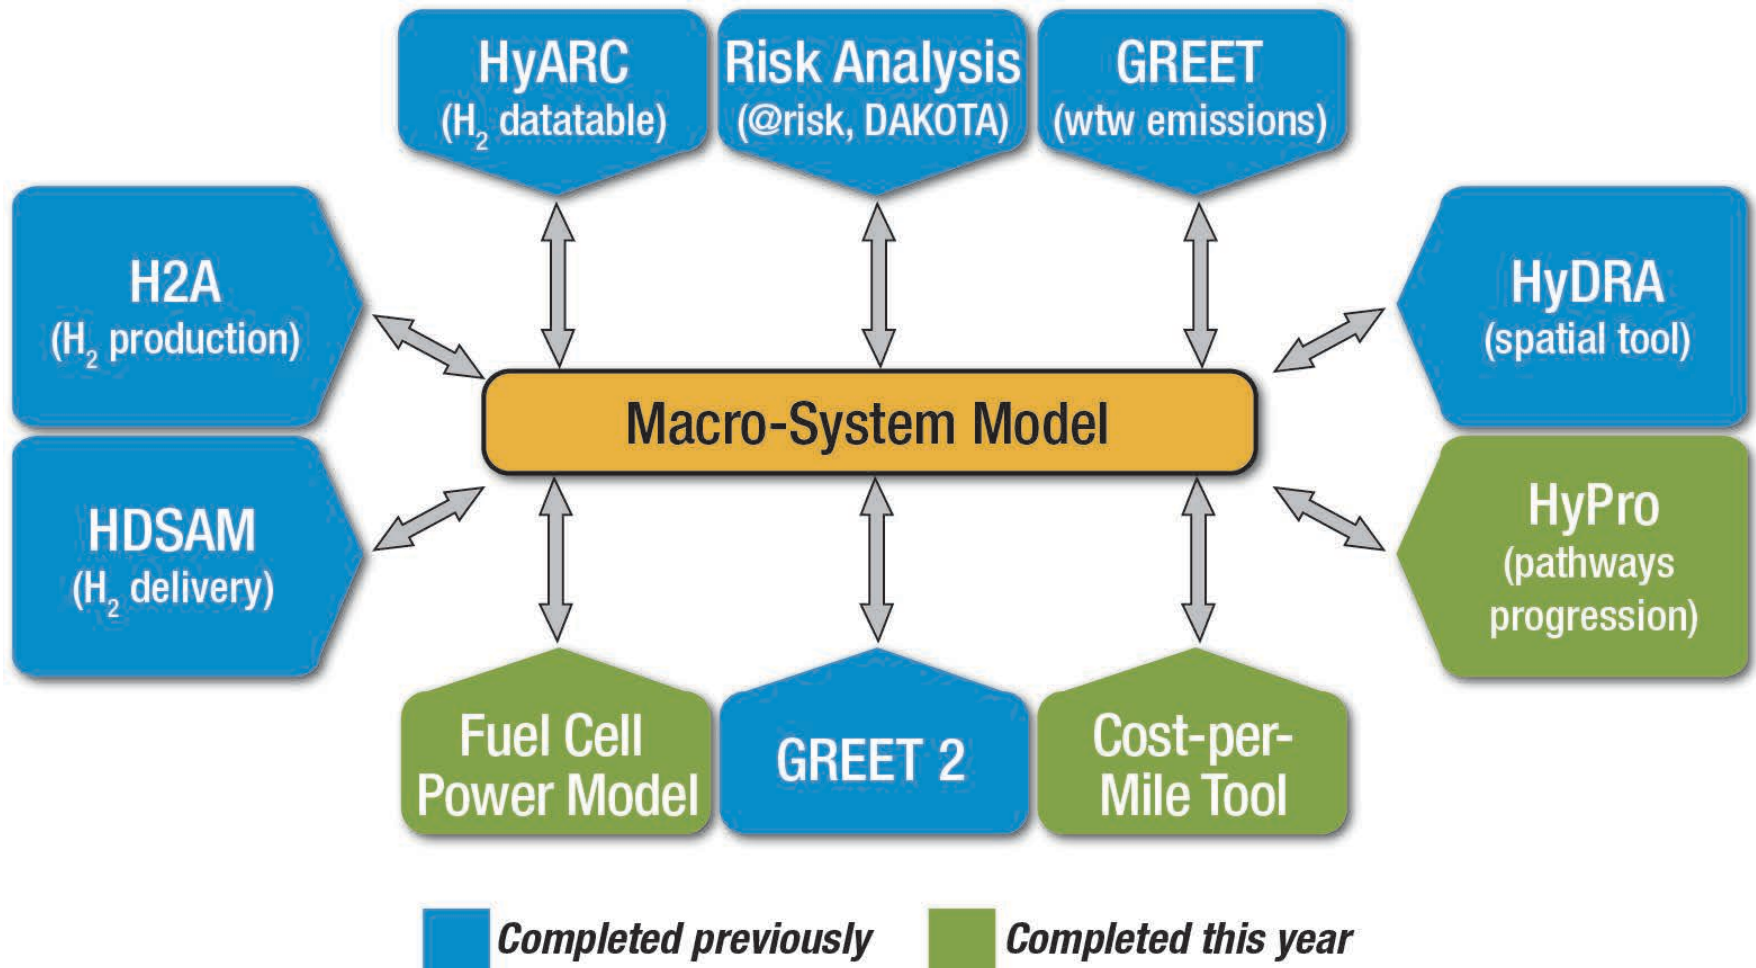


HyPro: Original Structure

HyPro was originally built as a stand-alone tool with three major pieces

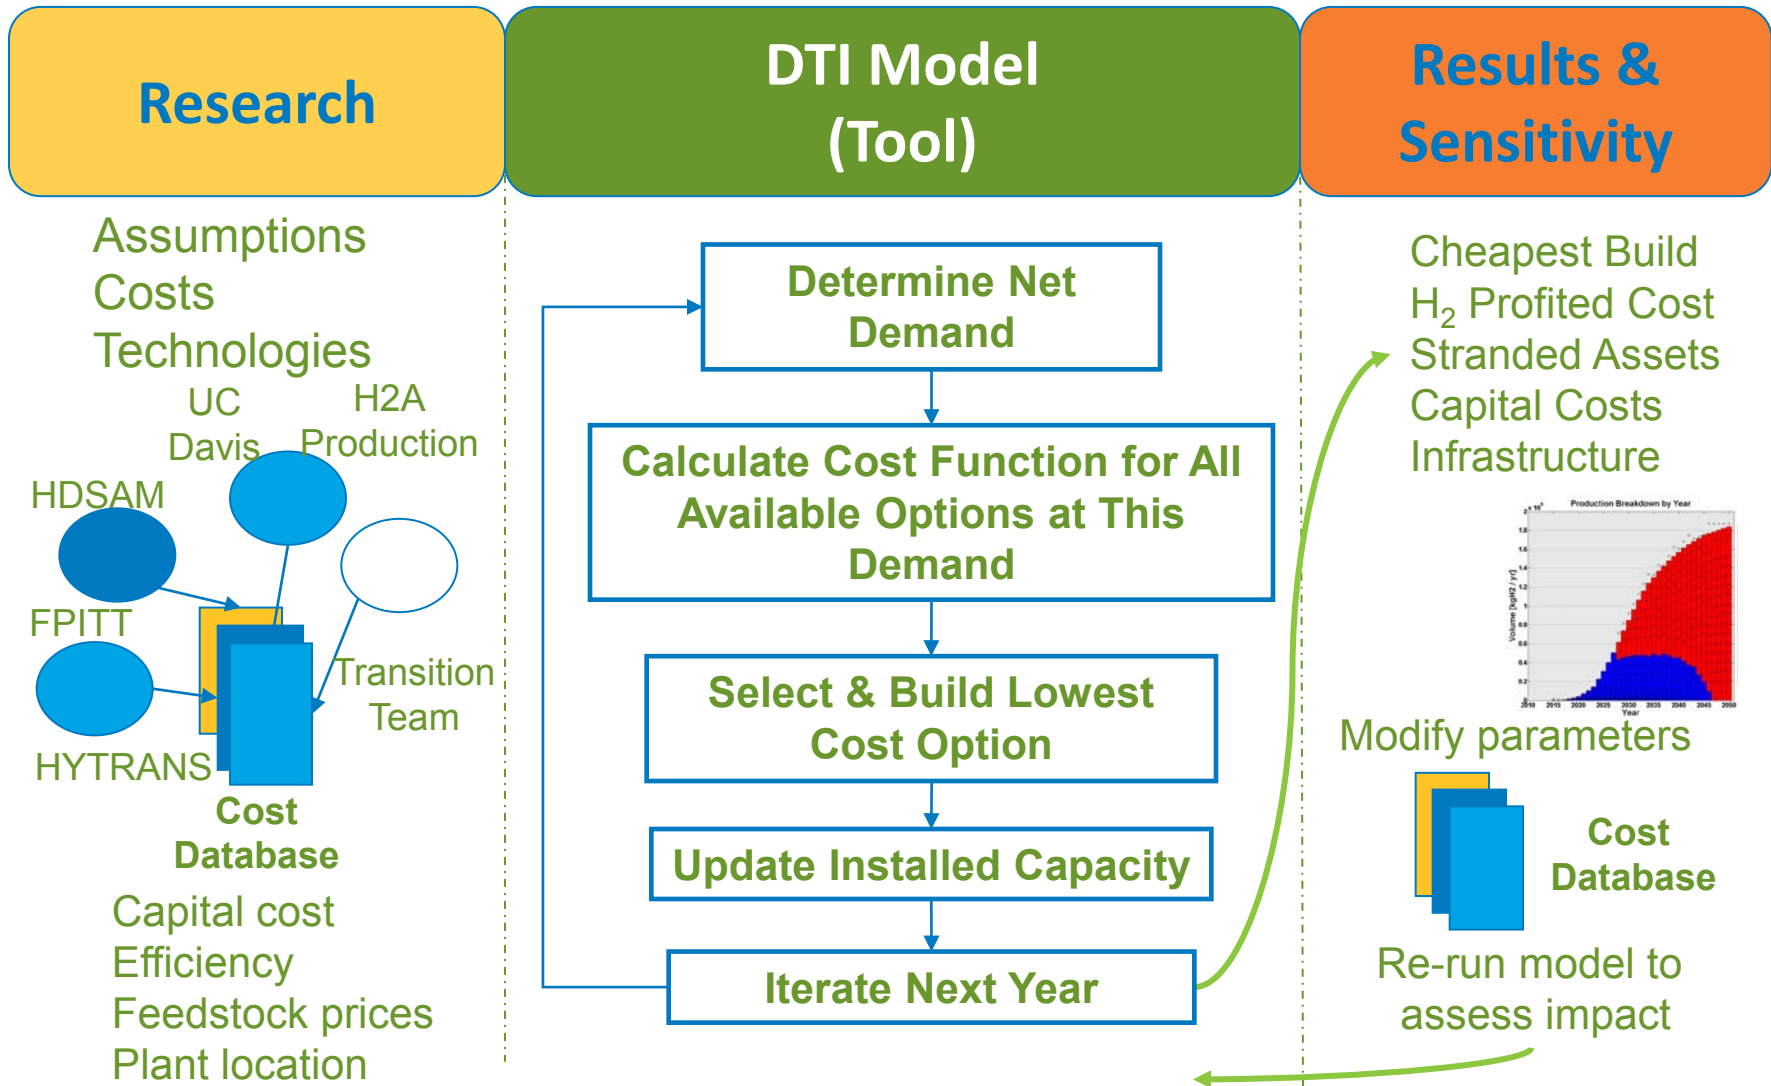

HyPro was linked to the MSM for this analysis. Linking

- Simplifies update of H2A & HDSAM input parameters
- Automates incorporation of GREET emissions data
- Simplifies performance of sensitivities that affect cost and emissions
- Allows new technologies to be characterized and implemented into the HyPro tool easily

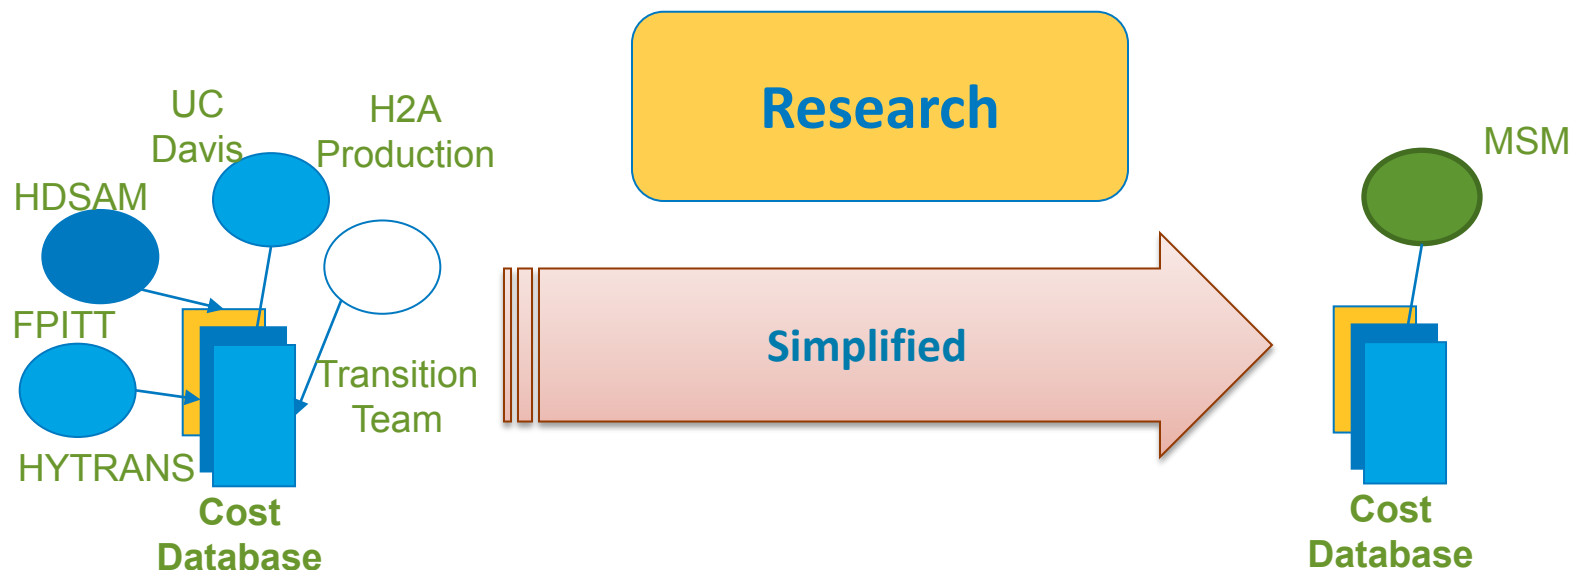

H2A V2 and HDSAM V2.2 costs were used for this analysis. Advanced costs implemented in 2025. Technology combinations shown below.

Central Production	Delivery
Coal	Liquid truck or pipeline
Coal with CCS	Liquid truck or pipeline
Natural Gas	Liquid truck or pipeline
Natural Gas w/ CCS	Liquid truck or pipeline
Biomass	Liquid truck or pipeline
Central Electrolysis	Liquid truck or pipeline
Nuclear High Temp. Electrolysis	Liquid truck or pipeline
Existing Capacity	Liquid truck

Distributed (FC) Production
Steam Methane Reforming (SMR)
Electrolysis
Ethanol Reforming

Vehicles
Fuel Cell Electric Vehicles (FCEVs) with 350 bar compressed gas storage

CCS: Carbon Capture and Sequestration

Many assumptions are embedded in the models being linked but can be changed in sensitivity runs.

Production

- Central Biomass
 - Current – 48% feedstock efficiency
 - Advanced – 50% feedstock efficiency
- Coal Gasification
 - Current – 56% feedstock efficiency
 - Advanced – 64% feedstock efficiency
 - CCS Current – 55% feedstock efficiency
 - CCS Advanced - 61% feedstock efficiency
- Distributed SMR
 - Current – 73% feedstock efficiency
 - Advanced – 78% feedstock efficiency
- Electrolysis
 - Current – 62% feedstock efficiency
 - Advanced – 75% feedstock efficiency

Financial

- 10% IRR
- 20 year plant life
- MACRS depreciation where appropriate
- 1.9% inflation

Pathway Assumptions

- NAS buildout rates
- Urban demand area
- 12,000,000 person city
- 50% FCEV penetration in 2050
- 1500 kg/day station design capacity
- Mid-size FCV –
 - Current – 45 mi / GGE


HDSAM

- Fueling station capacity factor = 0.84
- 62 miles from central production to city
- Liquefier efficiency 72%

GREET





- Gasoline is RFG without oxygenate
- Current technologies use U.S. average grid mix
- Advanced technologies use future grid mix with 90% of CO₂ from coal plants sequestered

Using default cost parameters, distributed SMR is built out initially followed by central coal with pipeline delivery.

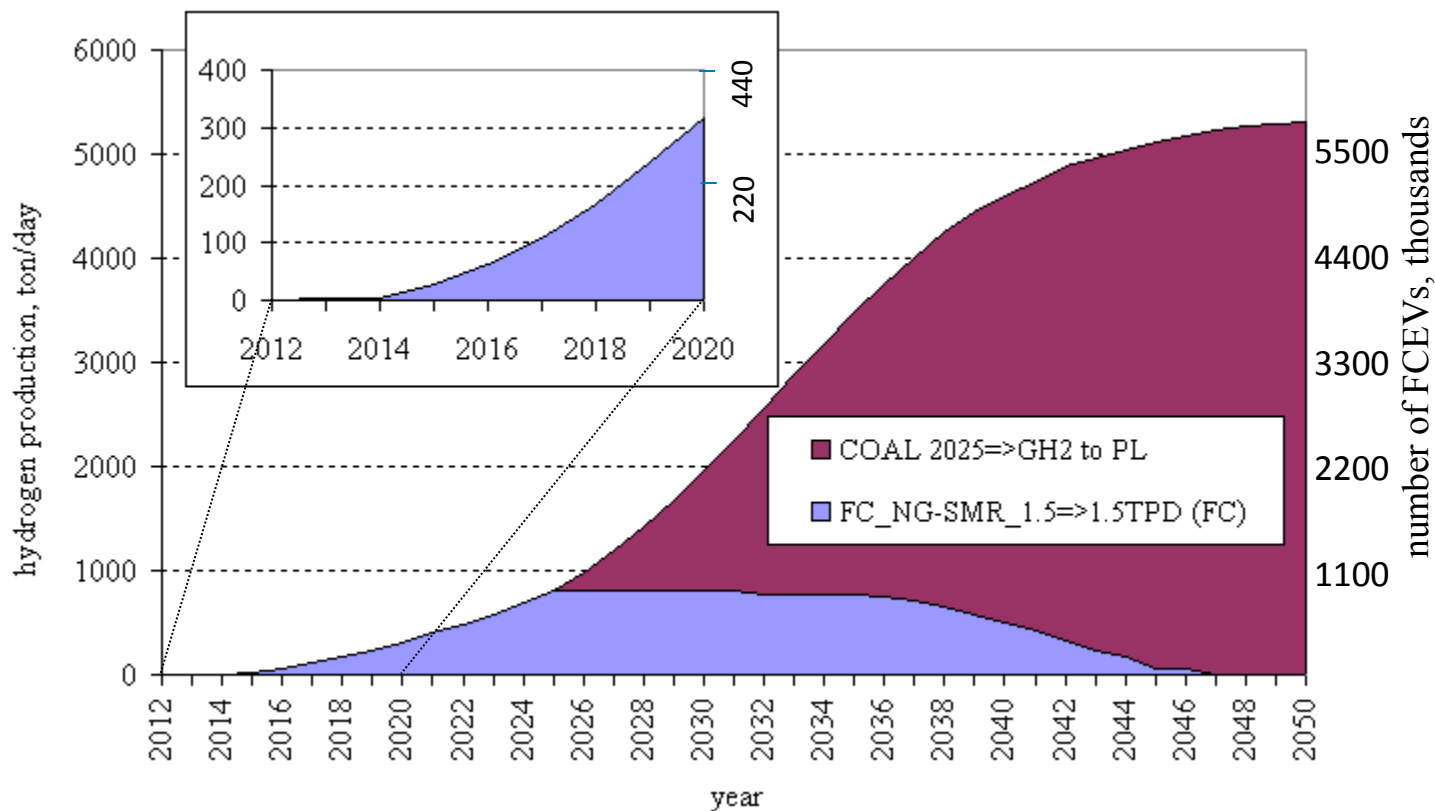

Exogenous demand curve based on form recommended by the National Academy of Sciences (2004). Adapted for Los Angeles and 50% penetration of FCEVs with fuel economies of 45 mpgge


Adjusting the cost of carbon affects the technology selection.

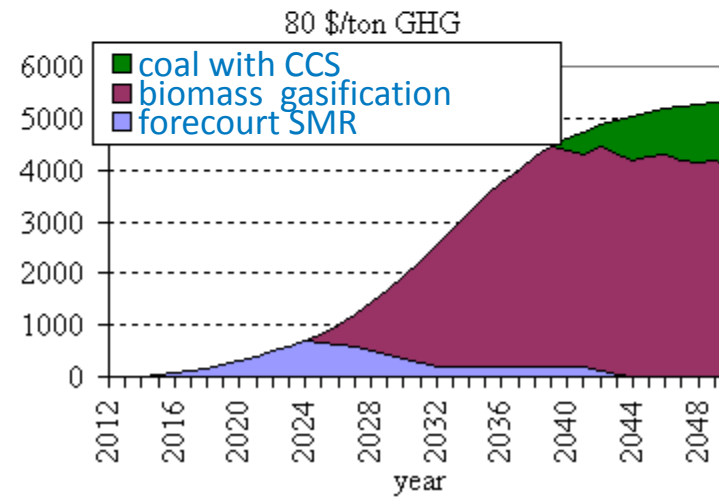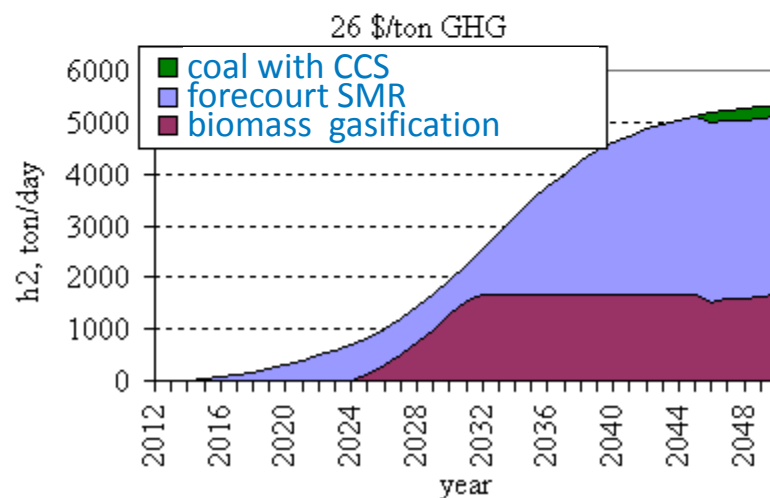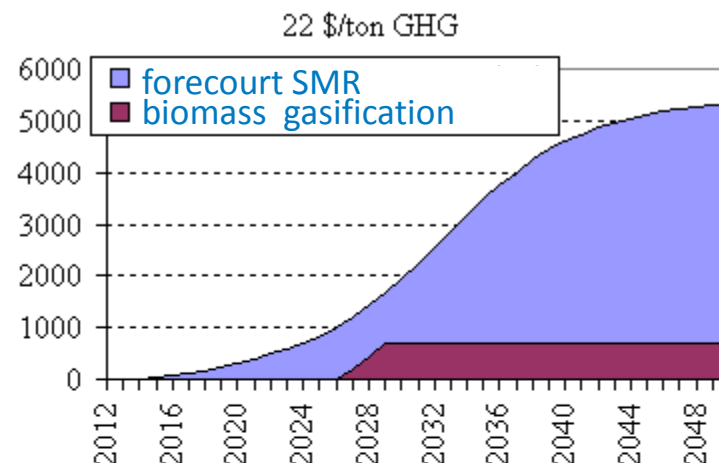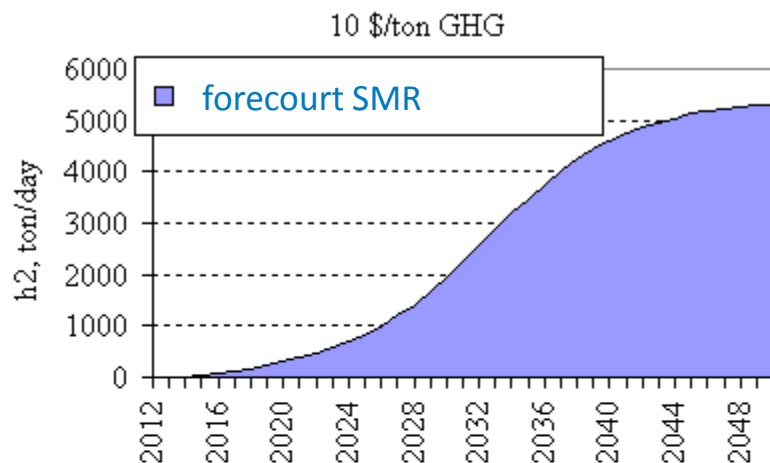


A \$10/ton CO₂eq cost of carbon pushes the selection to distributed SMR, higher costs result in biomass-based hydrogen, \$80/ton results in some penetration of coal gasification with CCS

Adjusting the cost of carbon affects the technology selection. The figure below shows the breakpoints on that parameter.


Cumulative (2012-2050) emissions for a 12 million population city, megaton CO₂ equivalent

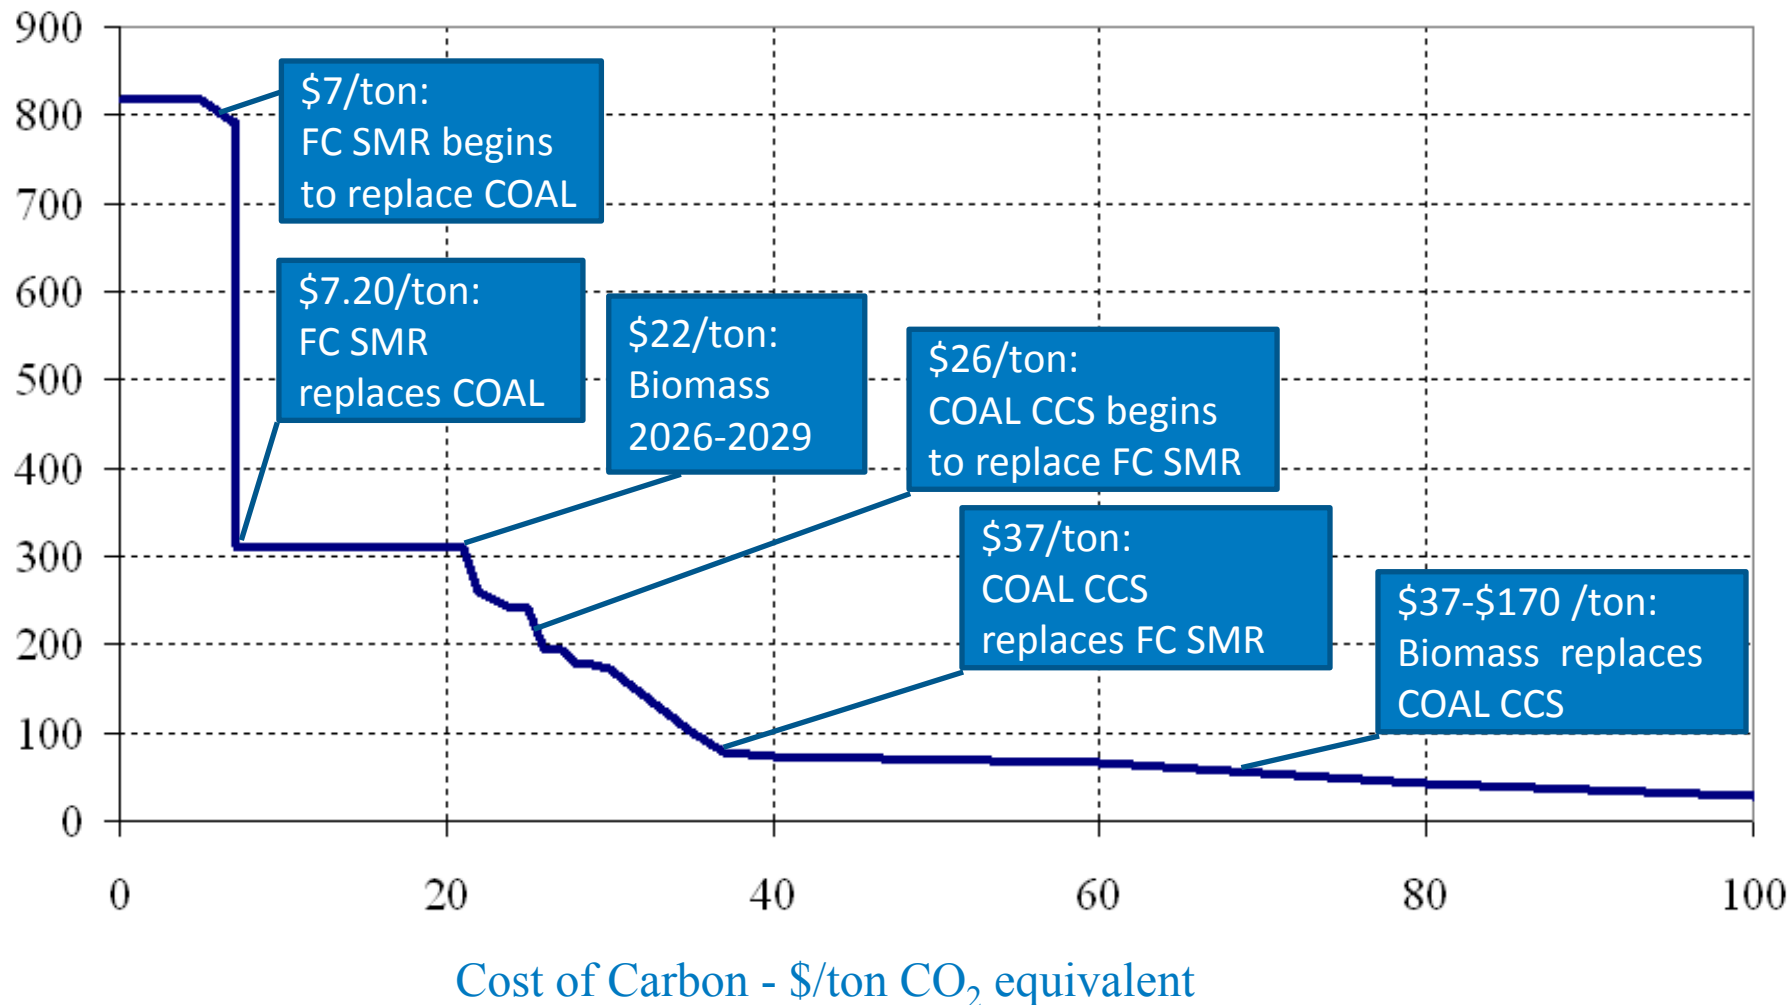


Increased costs of carbon open the markets for more expensive but cleaner technologies. Consumer costs (levelized cost plus cost of carbon) go up and the carbon footprint goes down but the amount paid for carbon emissions is limited.

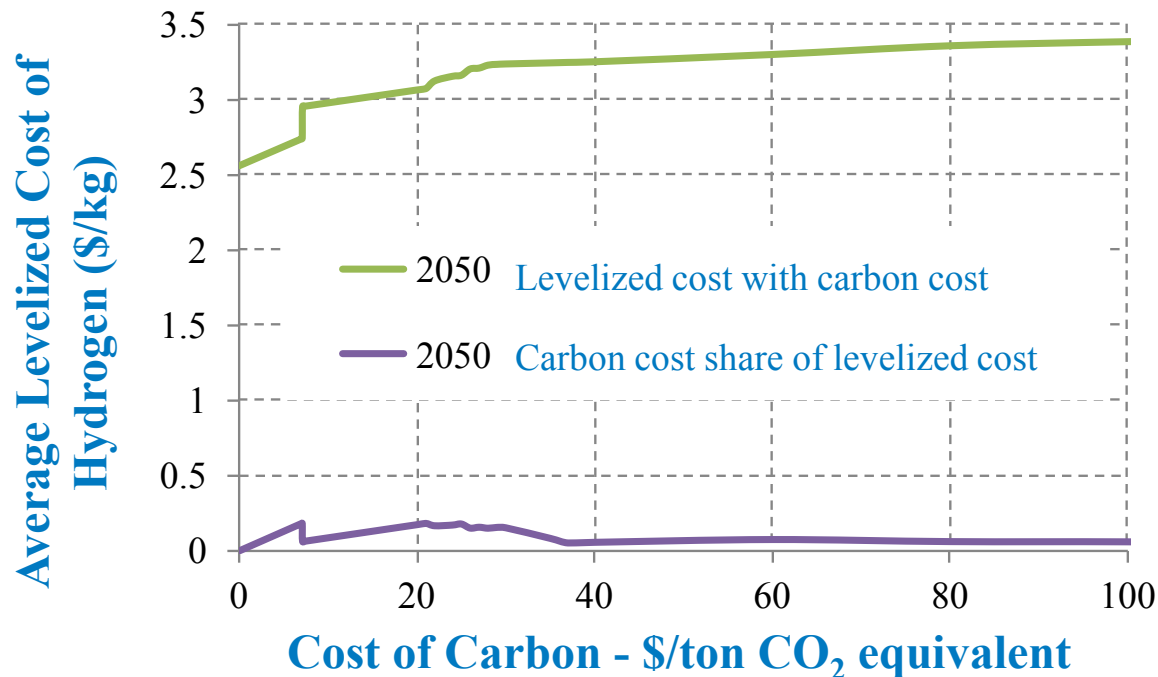


Required internal rate of return (IRR) also affects technology selection

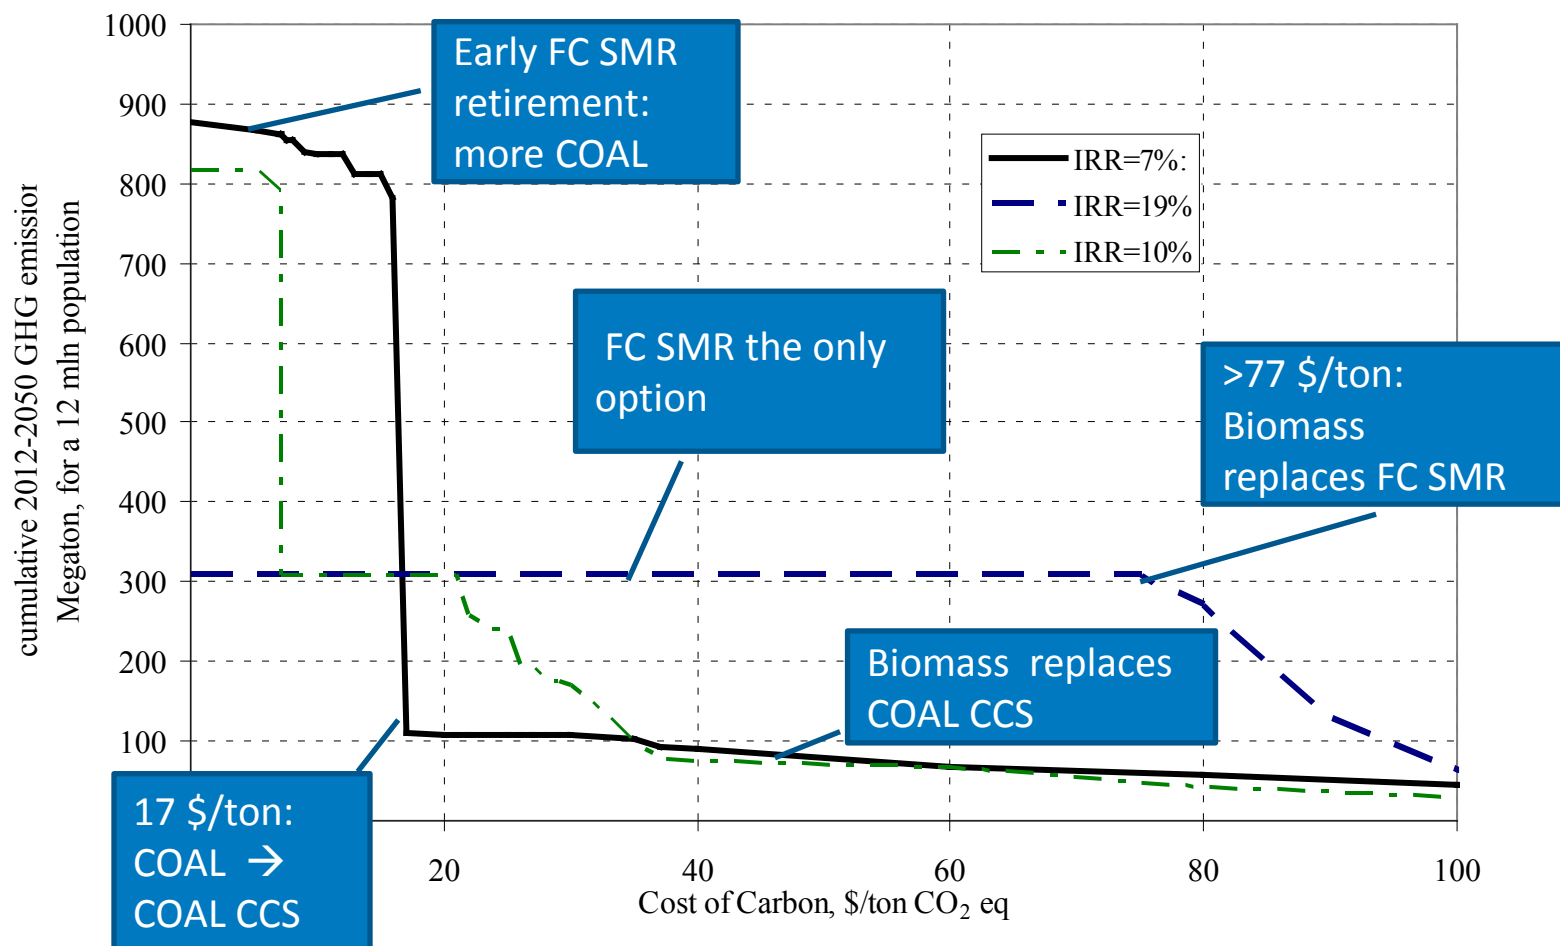

In scenarios where coal without CCS is not allowed, distributed SMR is the only technology selected. Other technologies do not become cost competitive until capital cost of distributed SMR is increased by over 70%.

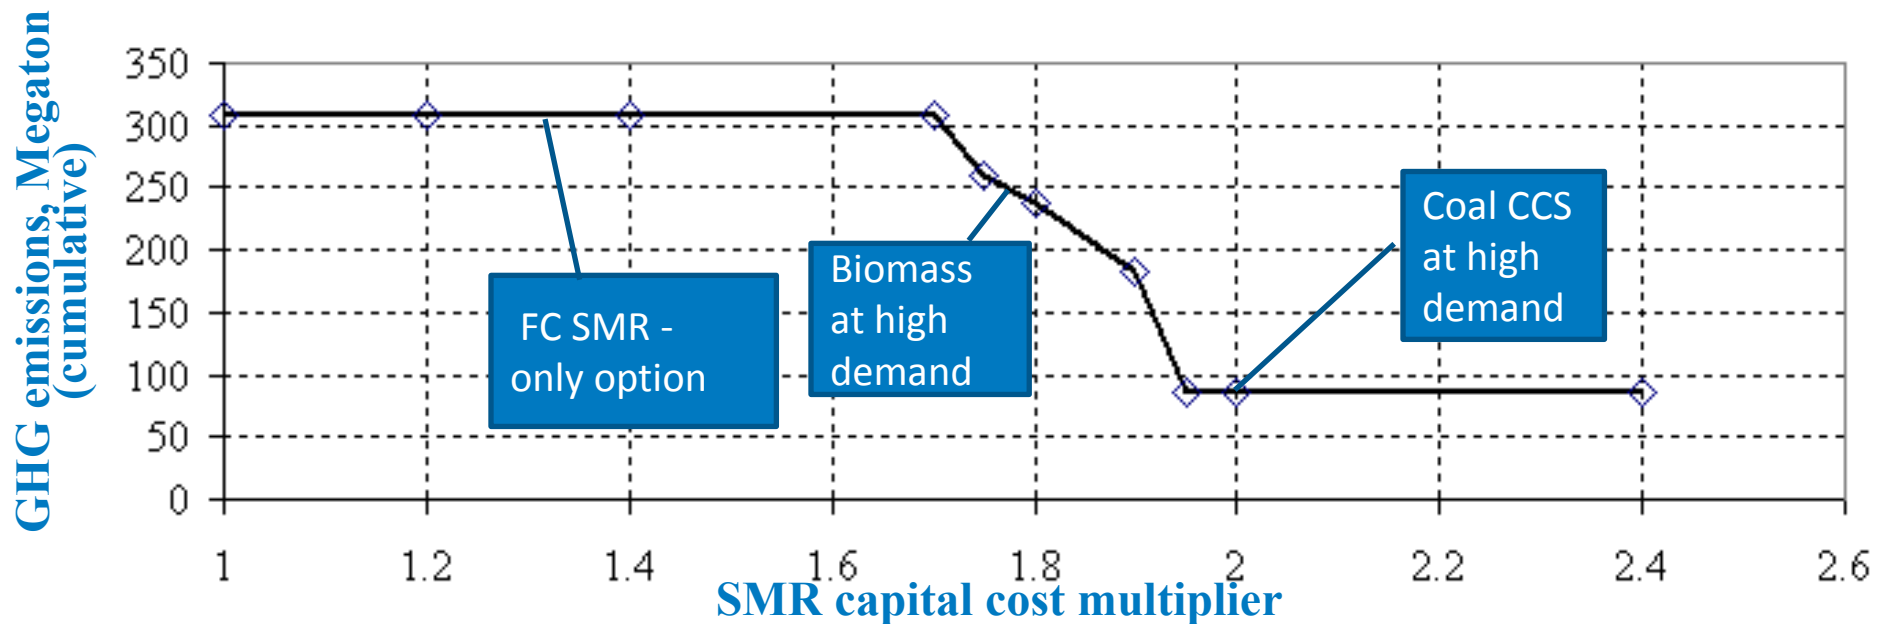


At capital cost factors of 1.95 and above, multiple technologies are selected.

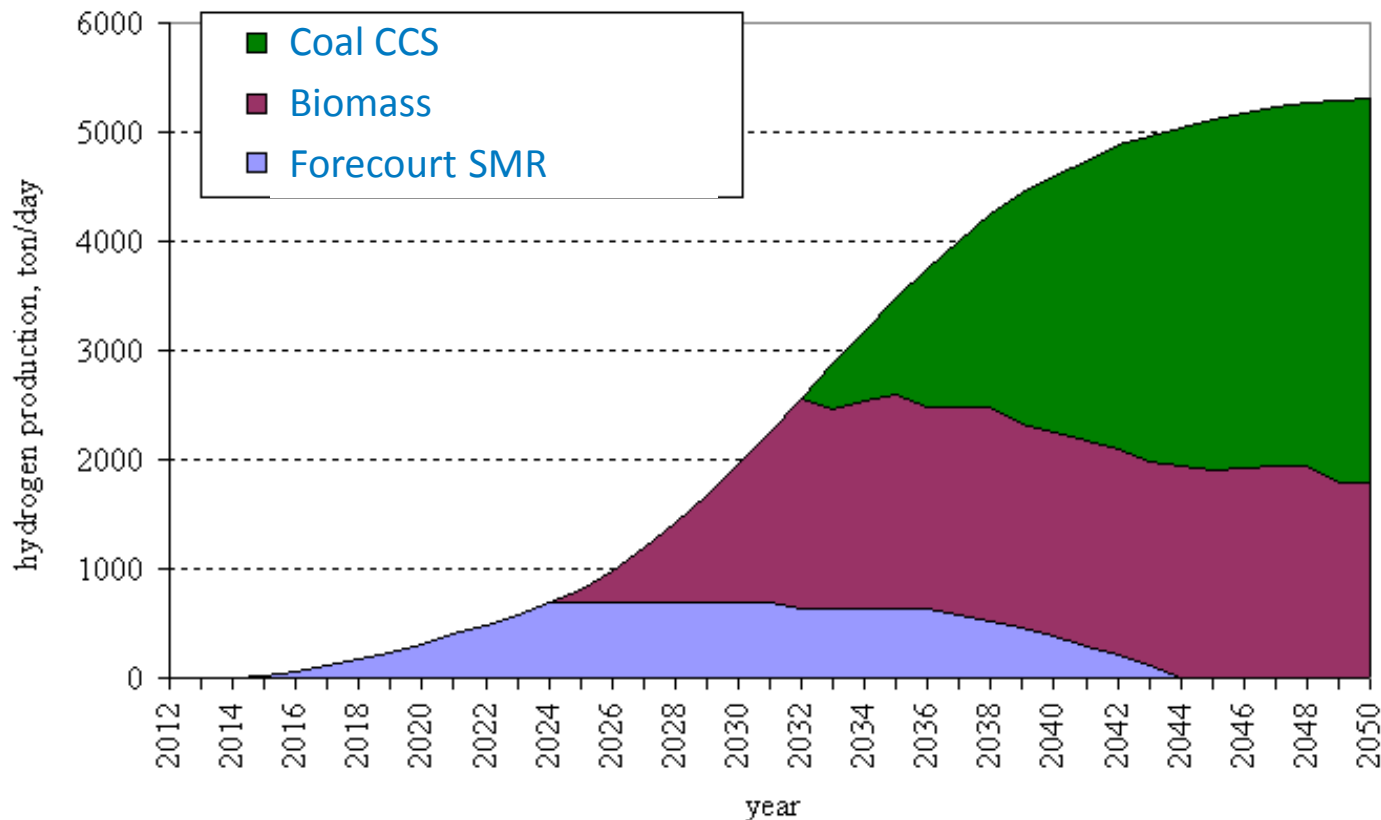


Buildout scenario with SMR capital cost factor of 1.95

Biomass capital costs need to be reduced by 30%-70% before central biomass gasification with hydrogen delivered in pipelines becomes cost competitive with distributed SMR at high demand growth.

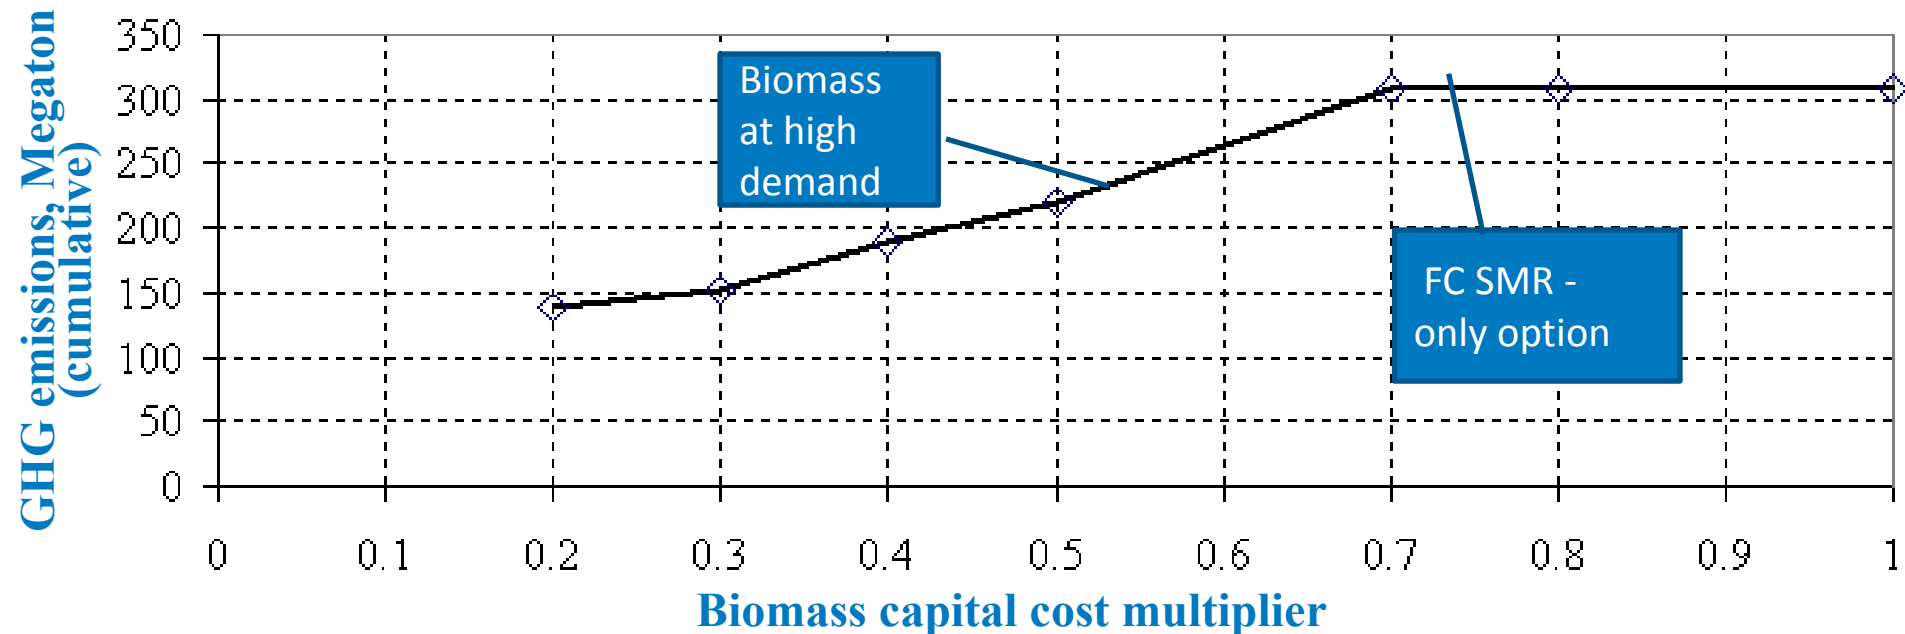


Coal without CCS not allowed for this scenario

Biomass feedstock prices need to be reduced by 40%-60% before central biomass gasification with hydrogen delivered in pipelines becomes cost competitive with distributed SMR at high demand growth.

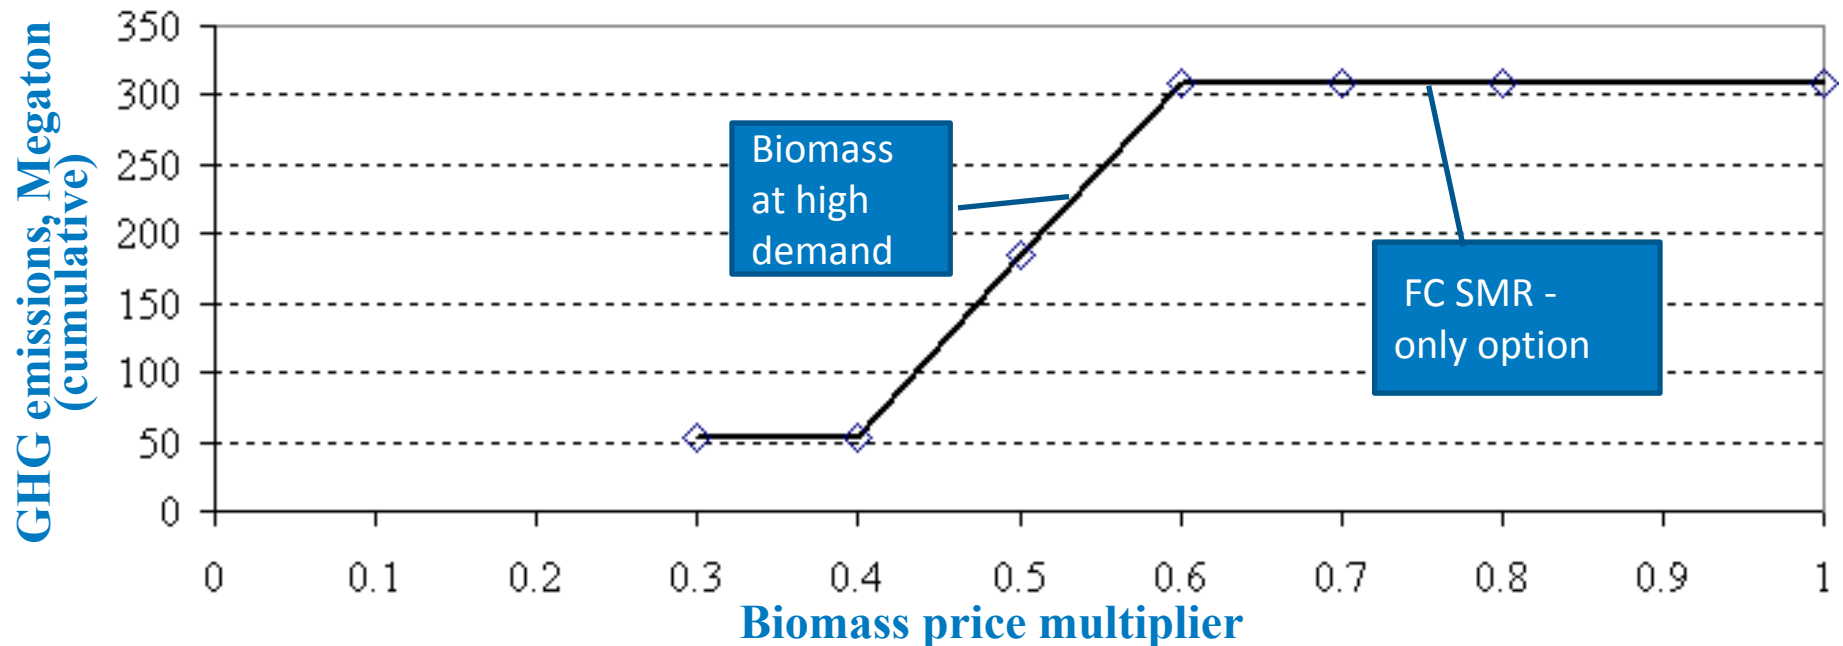

Coal without CCS not allowed for this scenario

Electricity prices need to be reduced by 30%-50% before distributed electrolysis becomes cost competitive with distributed SMR.

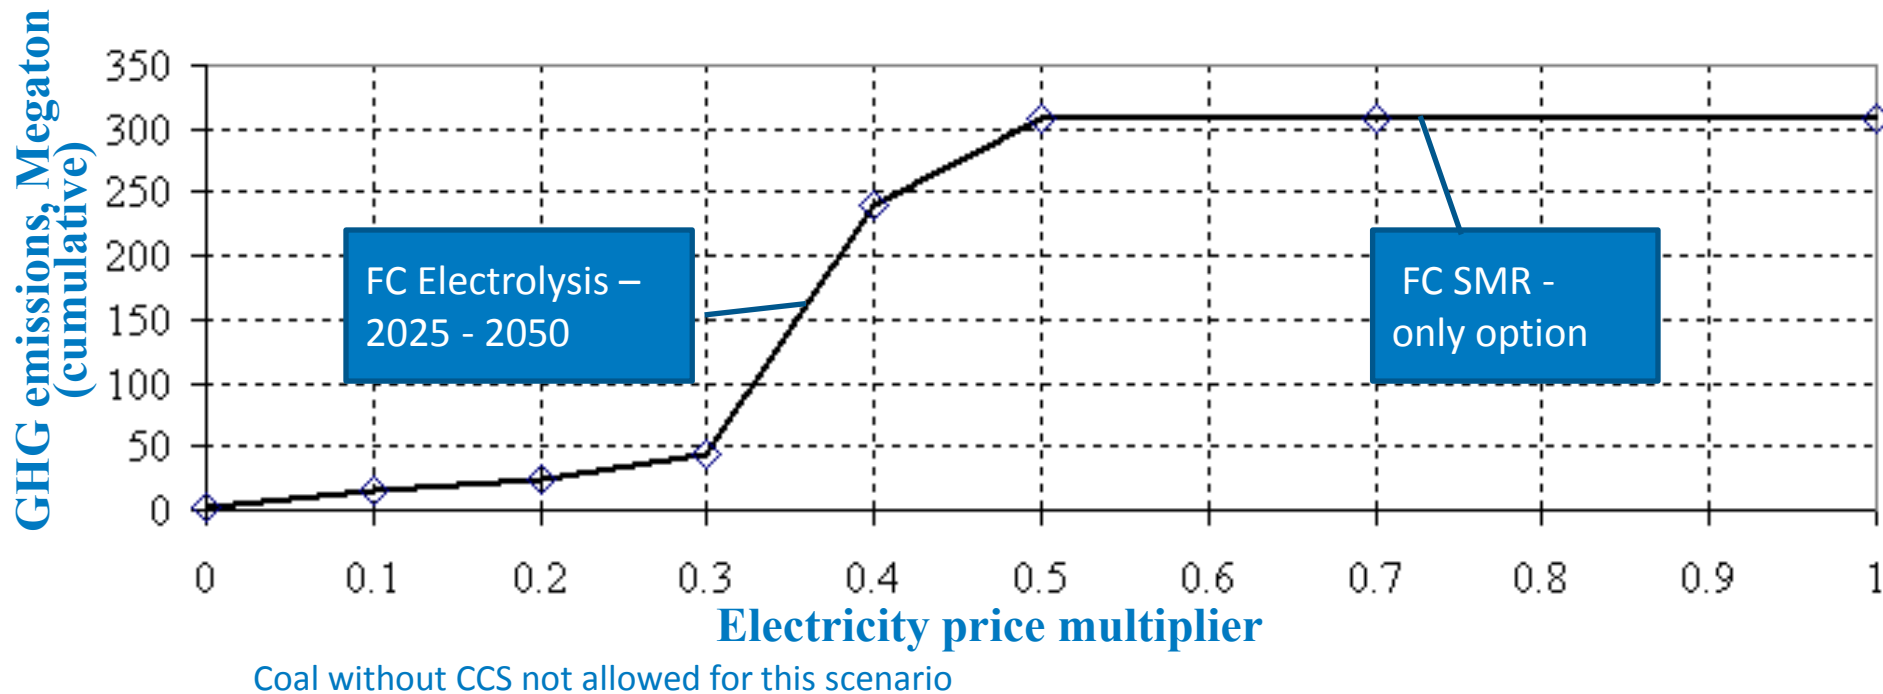

Conclusions

- **Based on current cost projections and a required 10% IRR, distributed SMR is the most cost-effective technology to roll out in the early commercial stage.**
- **Central coal (without CCS) is the most cost-effective technology at higher demand growth if carbon is not limited.**
- **The cost of carbon limits coal without CCS. It is replaced by distributed SMR, biomass, and coal with CCS as the cost increases.**
- **Distributed SMR is the most cost-competitive technology when central coal without CCS is not allowed. Other technologies need large capital or feedstock cost reductions.**

Proposed Future Work

This analysis is complete and no future work is planned. If we had funding, we would like to:


- **Update the analysis using new versions of H2A, HDSAM, and GREET**
- **Update the analysis with 200 kg/day stations, tube trailer delivery, and tri-generation options**
- **Spread out technology improvement (potentially using learning curves)**
- **Use supply curves instead of single values**
- **Add unforeseen randomness to the demand function**

As an ongoing project, the MSM is being updated, and an analysis of the parameters used in estimating levelized cost, energy use and emissions is underway.


Collaborations

- **NREL and DTI (now part of Strategic Analysis, Inc.) collaborated in the modeling and analysis**
- **Sandia National Laboratories developed much of the MSM interface**
- **Models from NREL and Argonne National Laboratory were used to generate inputs**
- **MSM parameters and results were reviewed by members of the Fuel Pathway Integration Technical Team: ExxonMobil, Chevron, Shell, ConocoPhillips**

Technical Backup Slides

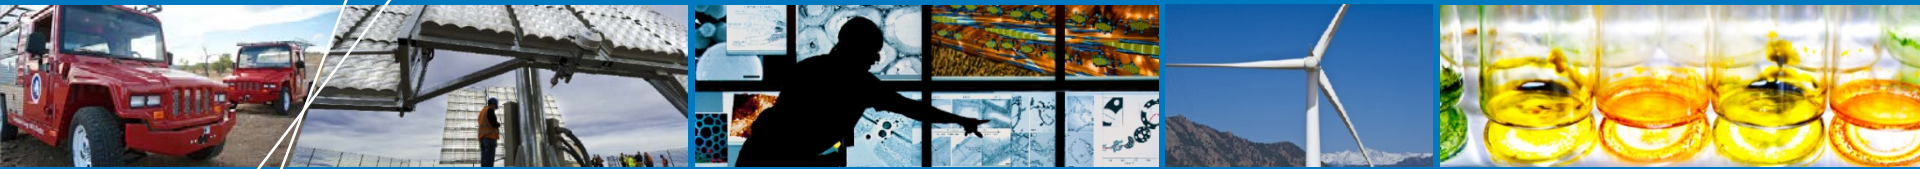


Moving from central to distributed production reduces capital investment due to a cost of carbon

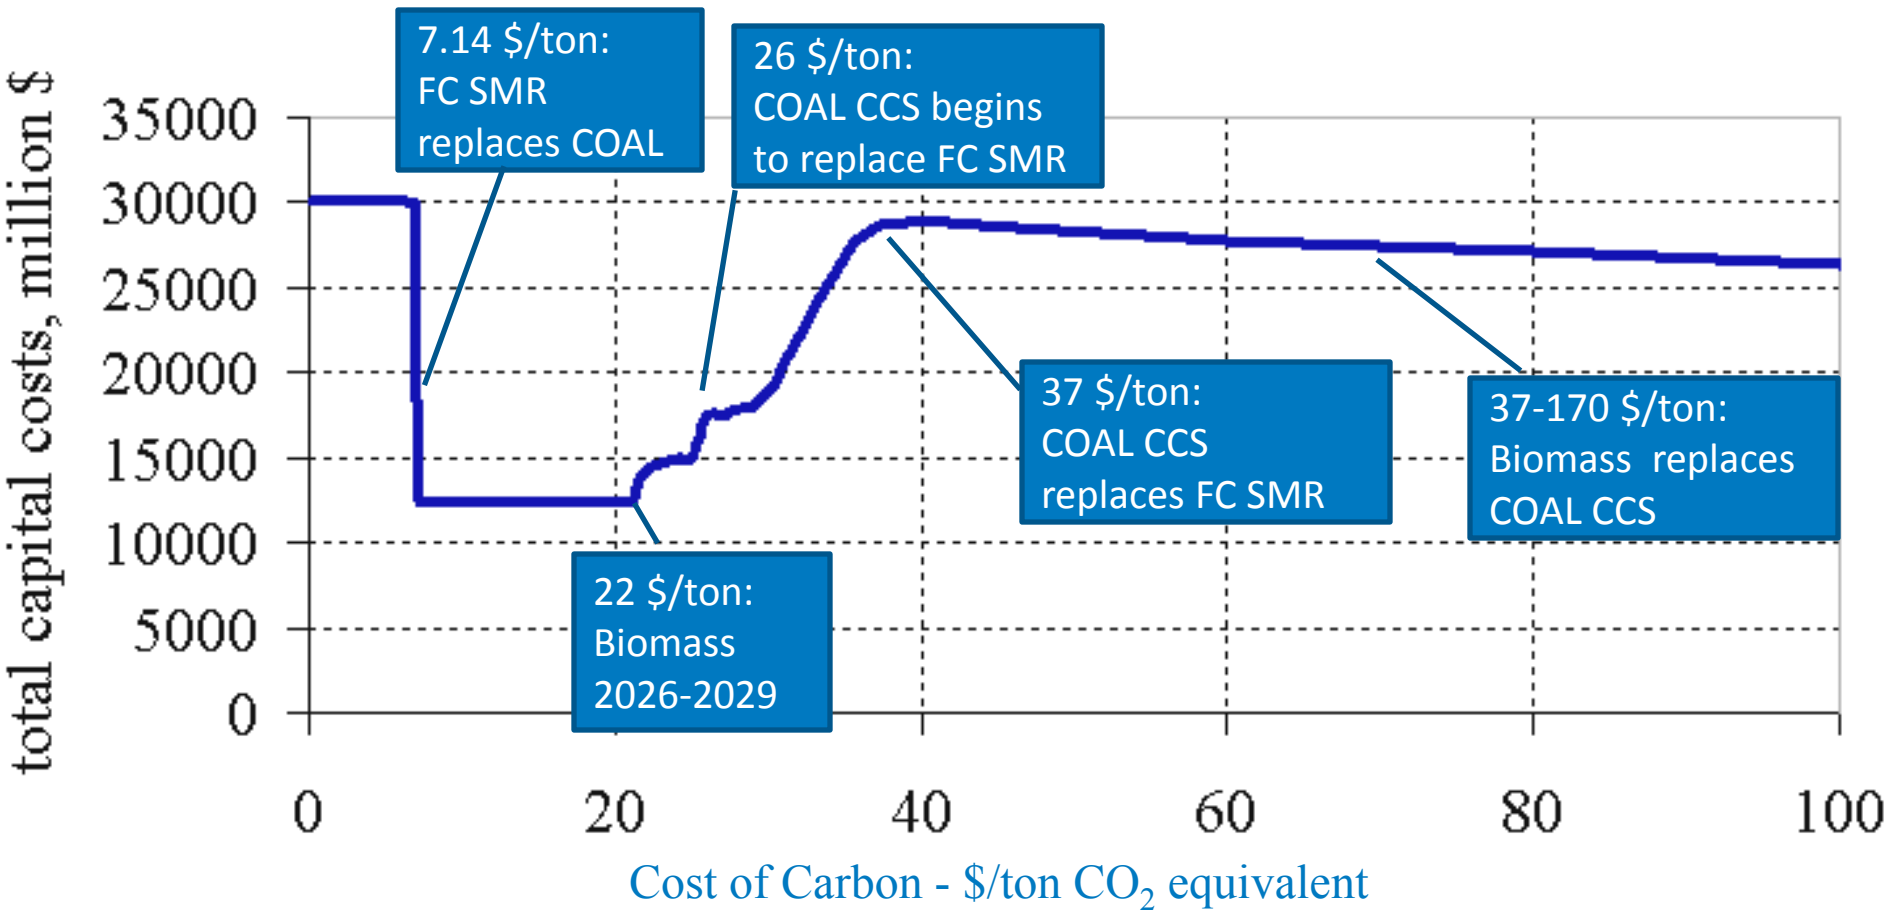










Demand Curve Parameters Affect Timing But Not Technologies Selected

Accomplishments and Progress

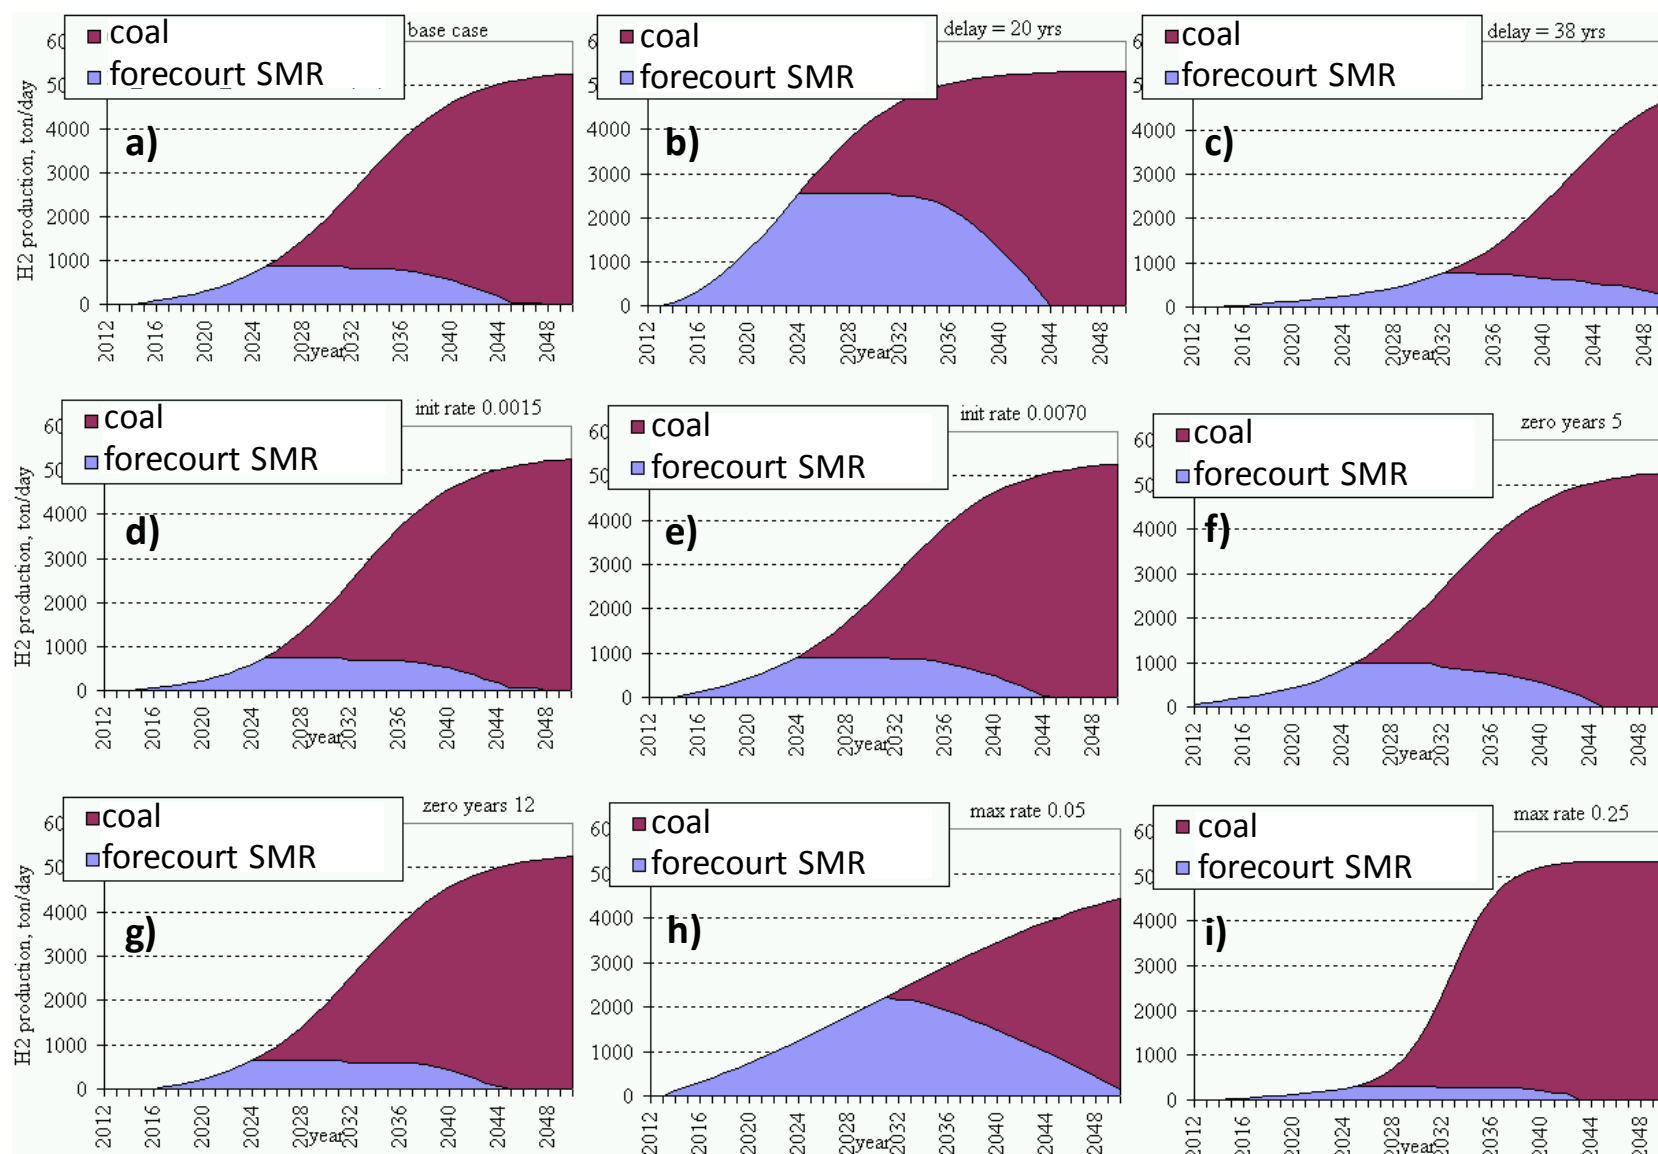

But Maximum Penetration Affects Technology Selection

Accomplishments and Progress

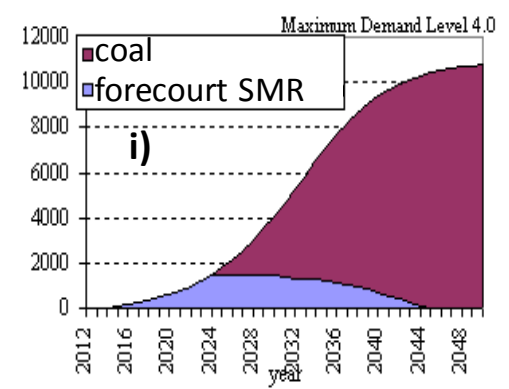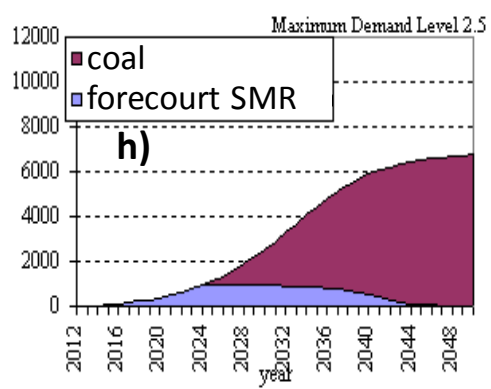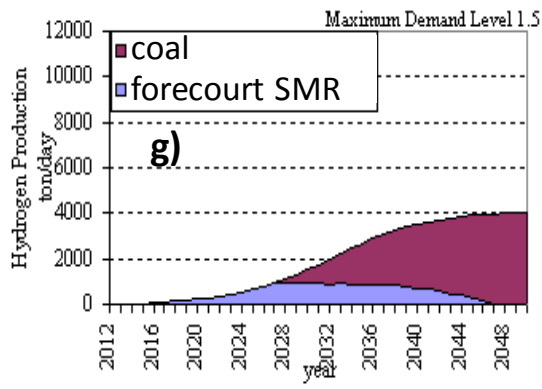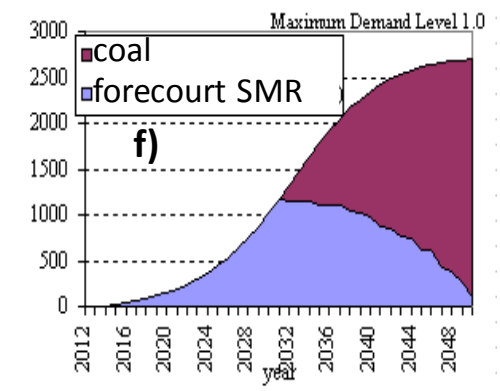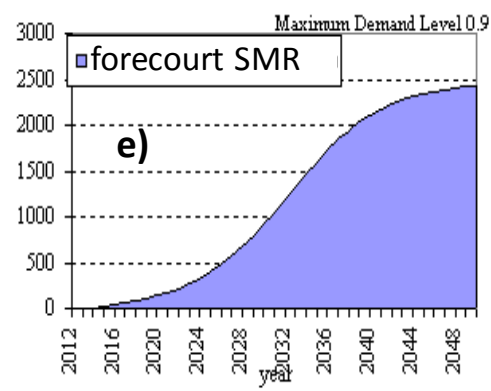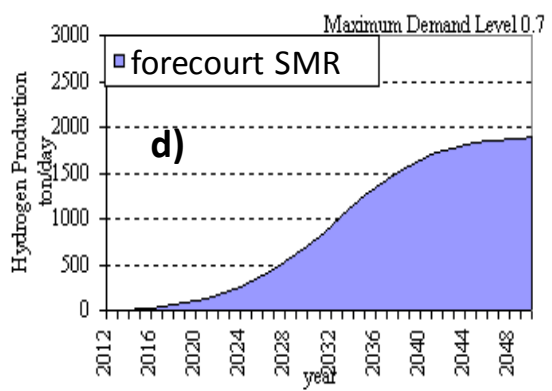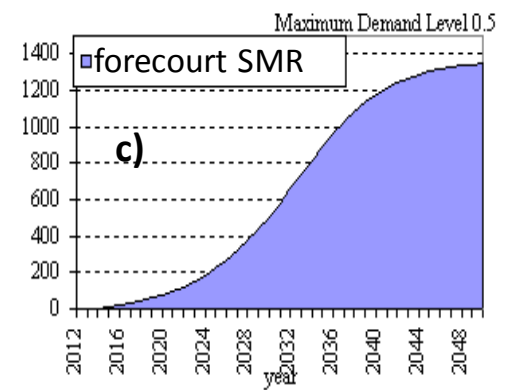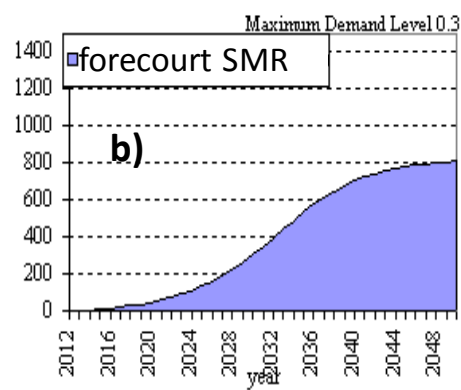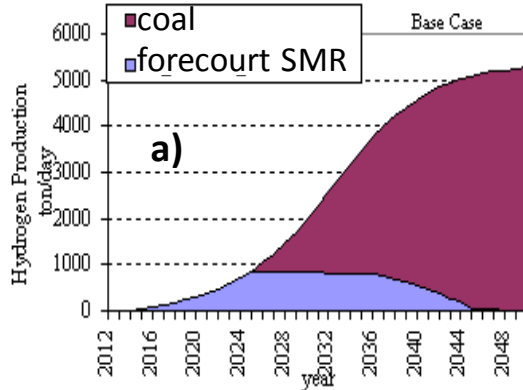

Approach: Model Validation

- Model inputs and results were reviewed by the Fuel Pathway Integration Tech Team (FPITT), others in the H₂ analysis community and industry experts
- One major MSM output – Pathway Report(s) – undergo thorough reviews by FPITT. The data reported in that report were used for this analysis.
- The H2A Production models and HDSAM are built in a transparent way and undergo their own validation prior to being published; these models are reviewed by the Production Tech team and by the Delivery Tech team
- GREET is widely used and is being constantly reviewed and updated

Validating models at both integrated and component levels