




# Simulation of Thermocline Formation in an Experimental Molten-Salt Energy Storage System for Concentrating Solar Power Applications (CSP-5)

## Scientific Achievement:


Thermal analysis at Purdue University of the experimental thermocline tank at IISc Bangalore; simulations are performed at flow velocities below and above a flow rate that induces instability in the thermocline region to identify a stability criterion.

## Significance and Impact:

It is critical to maintain a narrow thermocline region inside the tank to prevent significant losses in storage efficiency. A critical stability velocity exists inside tanks that contain low-cost filler material based on the opposing effects of viscous forces and buoyancy forces. Low velocities are stable; high velocities cause deconstruction by viscous fingering. A performance tradeoff exists in the operational velocity due to thermocline expansion by either diffusion (low velocities) or viscous deconstruction (high velocities).

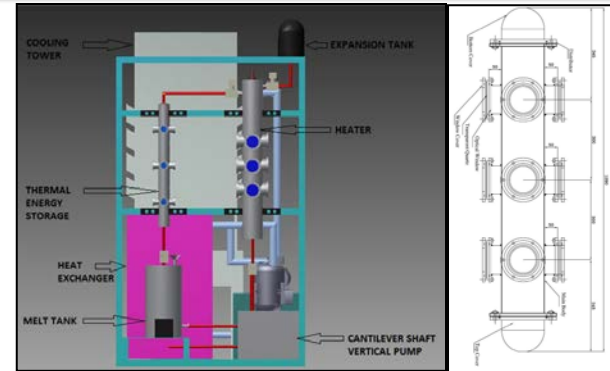

High-temperature molten-salt loop (left) and thermocline tank (right)

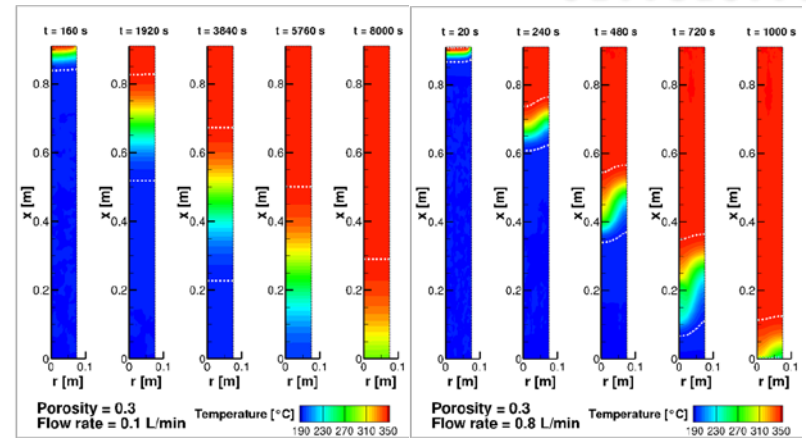

Temperature contours inside lab-scale thermocline tank with flow rate below (left) and above (right) the critical velocity during discharge

Contact(s): Suresh V. Garimella ([sureshg@purdue.edu](mailto:sureshg@purdue.edu))

**Publication(s):** C. Mira-Hernandez,<sup>1</sup> V. Patel,<sup>2</sup> P. Deepu,<sup>2</sup> S. Dawande,<sup>2</sup> J. A. Weibel,<sup>1</sup> S. Basu,<sup>2</sup> and S. V. Garimella,<sup>1</sup> "Simulation of thermocline formation in an experimental molten-salt energy storage system for concentrating solar power applications," ASME 8<sup>th</sup> International Conference on Energy Sustainability, Boston, MA, USA, June 30-July 2, 2014.

<sup>1</sup>Purdue University, West Lafayette, IN, USA

<sup>2</sup>Indian Institute of Science, Bangalore, Karnataka, India

